

OMP30

PRE-MIX MORTAR PUMP

Titan



TECHNICAL SPECIFICATIONS

POWER

Supply	400 V 50 Hz 25 amp
Electric Motor 1	5,5 kW
Electric Motor 2	2,2 kW

WORM PUMP

M30 Delivery Rate	30 lt / min standard
Mortar Pressure	30 bar
Max Aggregate Size	3 mm

HOSE

Inner Diameter	25 mm
Outer Diameter	40 mm
Working Pressure	40 bar
Burst Pressure	120 bar

DIMENSIONS

Height	132 cm
Width	105 cm
Length	162 cm
Weight	370 kg

HOPPER VOLUME

Volume	220 lt
--------	--------

Titan Makina Ltd. Şti.

1160. Sok. No:9 Ostim 06370 Ankara / Turkey

Phone : +90 312 354 9977 • Fax : +90 312 385 5611 • E-mail : titan@titanltd.com.tr • Web : www.titanltd.com.tr


OMP30

PRE-MIX MORTAR PUMP

Titan




Control Panel

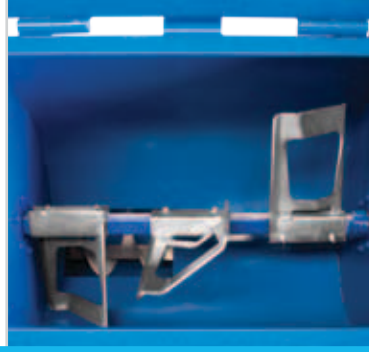

Pre Mixing Hopper



Sieve

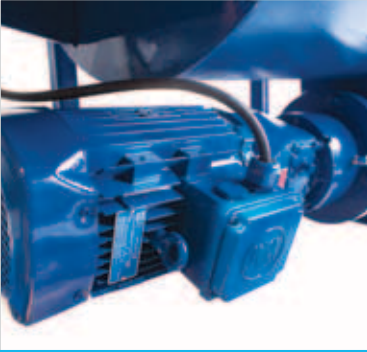


Worm Pump



Coupling System



Safety Switch

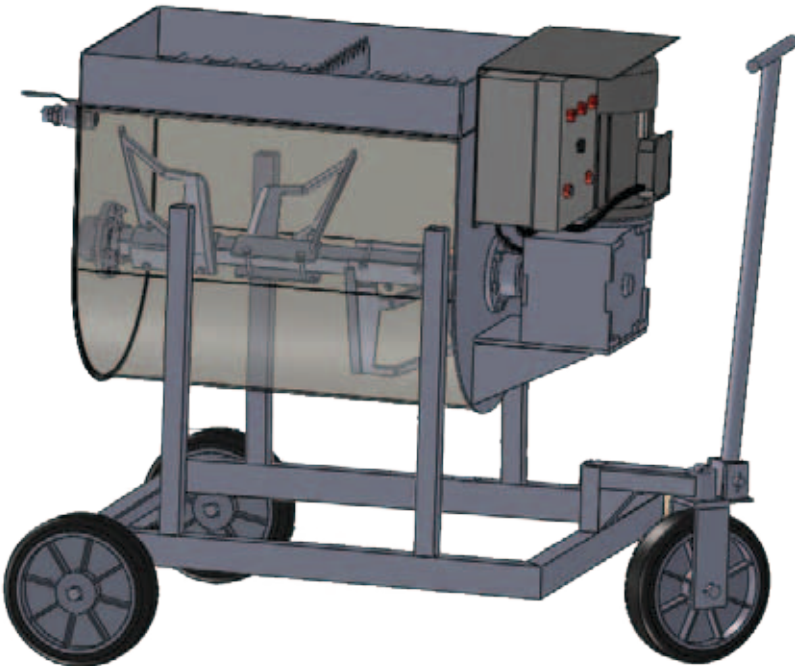

Application :

Titan OMP30 is used for concrete mortar preparation for ground stabilisation purposes such as rock bolting and anchoring. Mortar can be prepared in the hopper with the required water / cement ratio and transferred to the application point via the worm pump, through the hose. OMP30 is capable of preparing and pumping mortar with 0,40 water / cement ratio. Practical and simple design lets the machine to be operated easily. It can be operated in tough field conditions thanks to its simplicity.

Titan Makina Ltd. Şti.

1160. Sok. No:9 Ostim 06370 Ankara / Turkey

Phone : +90 312 354 9977 • Fax : +90 312 385 5611 • E-mail : titan@titanltd.com.tr • Web : www.titanltd.com.tr